

ISOVER PLC NT STONE WOOL BOARDS



Designation code CE: MW - EN 13162 - T3 - MU1



TECHNICAL SPECIFICATION

Insulating slabs made of Isover mineral wool. The production method is based on fibering mineral composition melt and other additives and ingredients. The mineral fibres produced are processed into the final slab shape in the production line. The entire fibre surface is made water repellent.

The slabs in the construction should be protected suitably against the weather effects (outer sheathing, alternatively diffusion foil). The slabs are coated with black non-woven fibreglass fabric.

APPLICATION

ISOVER PLC NT boards are used for thermal, acoustic and fire insulation in civil and industrial buildings:

- ventilated facades
- curtain walls
- ceilings
- partition walls with specified fire resistance performances
- metallic buildings walls
- wooden houses walls

PACKAGING, TRANSPORT, WAREHOUSING

ISOVER PLC NT boards are packaged in PE foil. The boards must be transported and stored avoiding contact with water, or other damage.

BENEFITS

- high thermal insulation performance (low thermal conductivity)
- fire safety - non combustible material
- excellent acoustic properties (high absorption coefficient)
- easy to handle, non-toxic
- low vapour flow resistance
- long term resistance in vertical position
- environment friendly and hygienic
- completely hydrophobic - is made water repellent
- long life span and time-stable properties
- resistant to mould, mildew, rodents and insects
- chemically neutral, non-corrosive
- easy workability - can be cut, drilled etc.

CERTIFICATES, STANDARDS, APPROVALS


- EC Certificate: 1840-DPC-99/91/EC/0114-07
- ISO 9001, ISO 14001, OHSAS 18001

TECHNICAL PARAMETERS

PARAMETER	UNIT	VALUE
THERMAL INSULATION PROPERTIES		
Declared thermal conductivity λ_D	W/(m K)	0,035
FIRE SAFETY PROPERTIES		
Reaction to fire	-	A1
OTHER PROPERTIES		
Maximum temperature for use	°C	200
Melting temperature	°C	≥ 1000
Water vapour diffusion resistance factor μ MU	-	1
Chemical behavior	-	It does not react chemically. Do not keep moisture. Allows vapor diffusion

DIMENSIONS AND PACKAGING

Product	Thickness (mm)	Length * Width (mm)	Dimension per package	Declared thermal resistance R_D (m ² .K/W)
PLC NT	50	1000 x 600	4,80	1,40
PLC NT	60	1000 x 600	3,60	1,70
PLC NT	80	1000 x 600	2,40	2,25
PLC NT	100	1000 x 600	2,40	2,85
PLC NT	120	1000 x 600	1,80	3,40

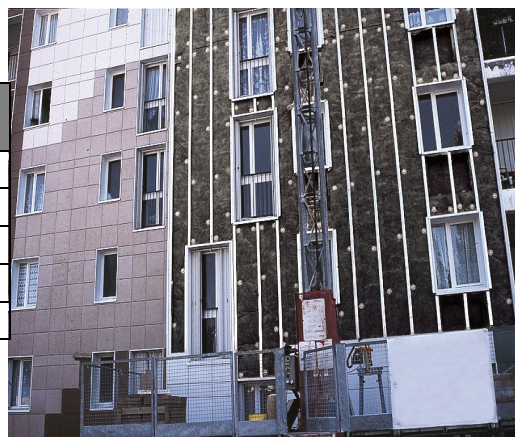

08.2017. Declared characteristics are valid at the date of publishing. The manufacturer reserves the right to change them.

Saint-Gobain Construction Products Romania SRL
ISOVER Business Unit
Tel: +40(0)21/207 57 23 Fax: +40(0)021207 57 21
E-mail: isover@isover.ro; web: www.isover.ro

ISOVER
SAINT-GOBAIN